



Door Construction


VERSION 2.3

Type A



1980 high x 410–910 wide

- Hollow Core • Poly Core • Solid Core

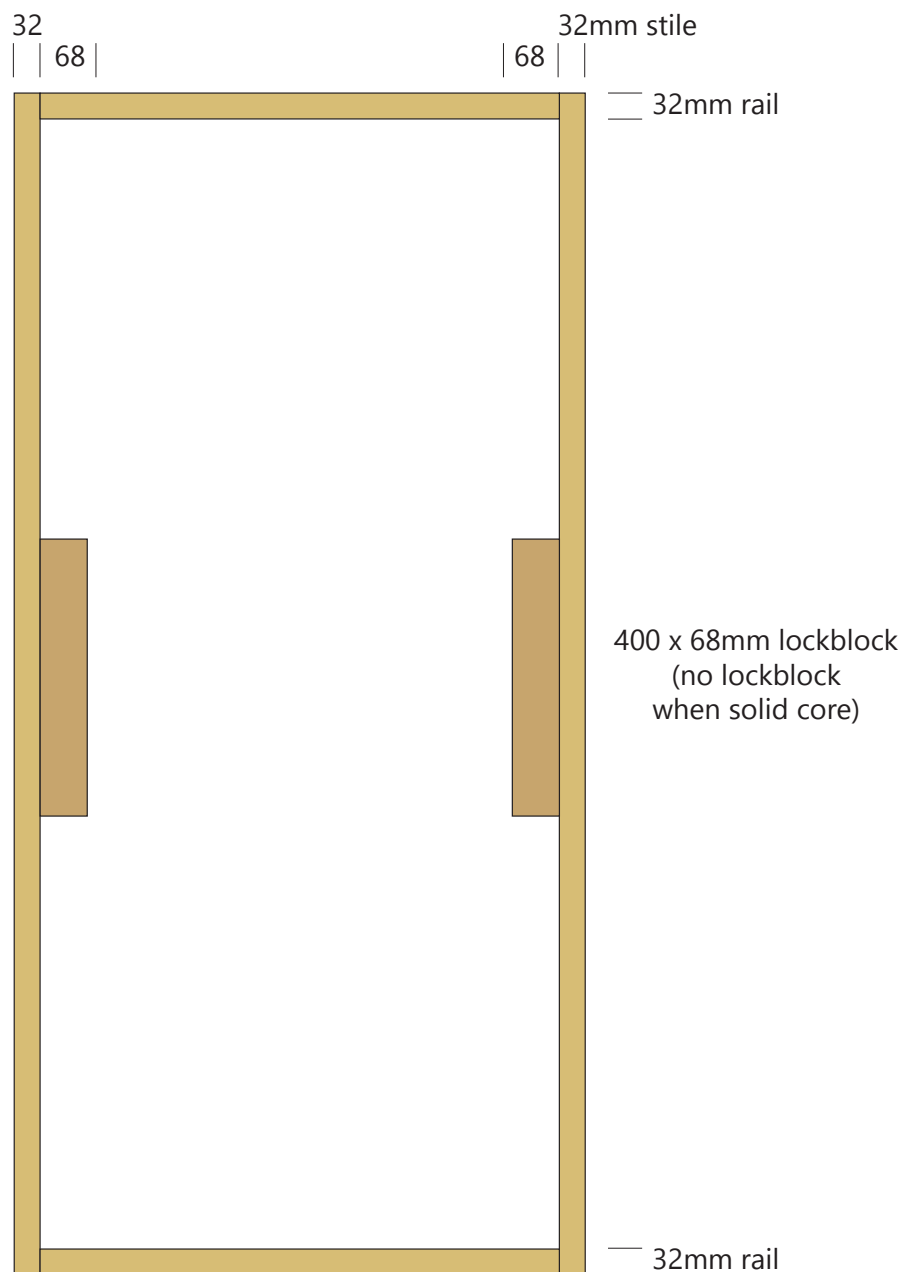


-
- External 32mm rails and stiles
 - 400 x 68mm lockblock
 - No lockblock when Solid Core
 - Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA

Type B



1981–2400 high x 410–910 wide

• Hollow Core • Poly Core • Solid Core

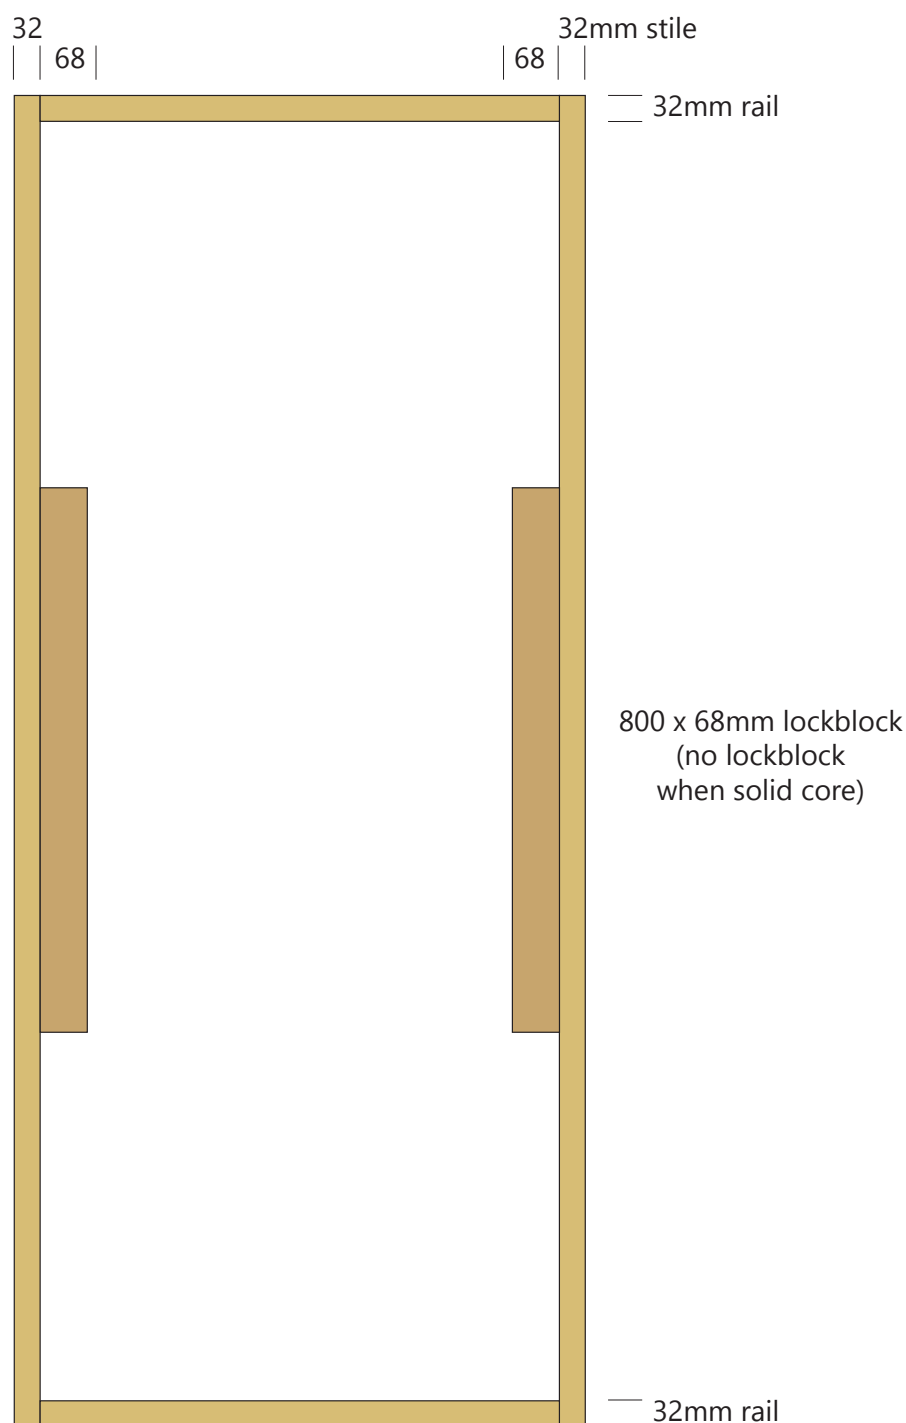


-
- External 32mm rails and stiles
 - 800 x 68mm lockblock
 - No lockblock when Solid Core
 - Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA

2401–2700 high x 410–1210 wide

1980–2700 high x 961–1210 wide

- Hollow Core • Poly Core • Solid Core

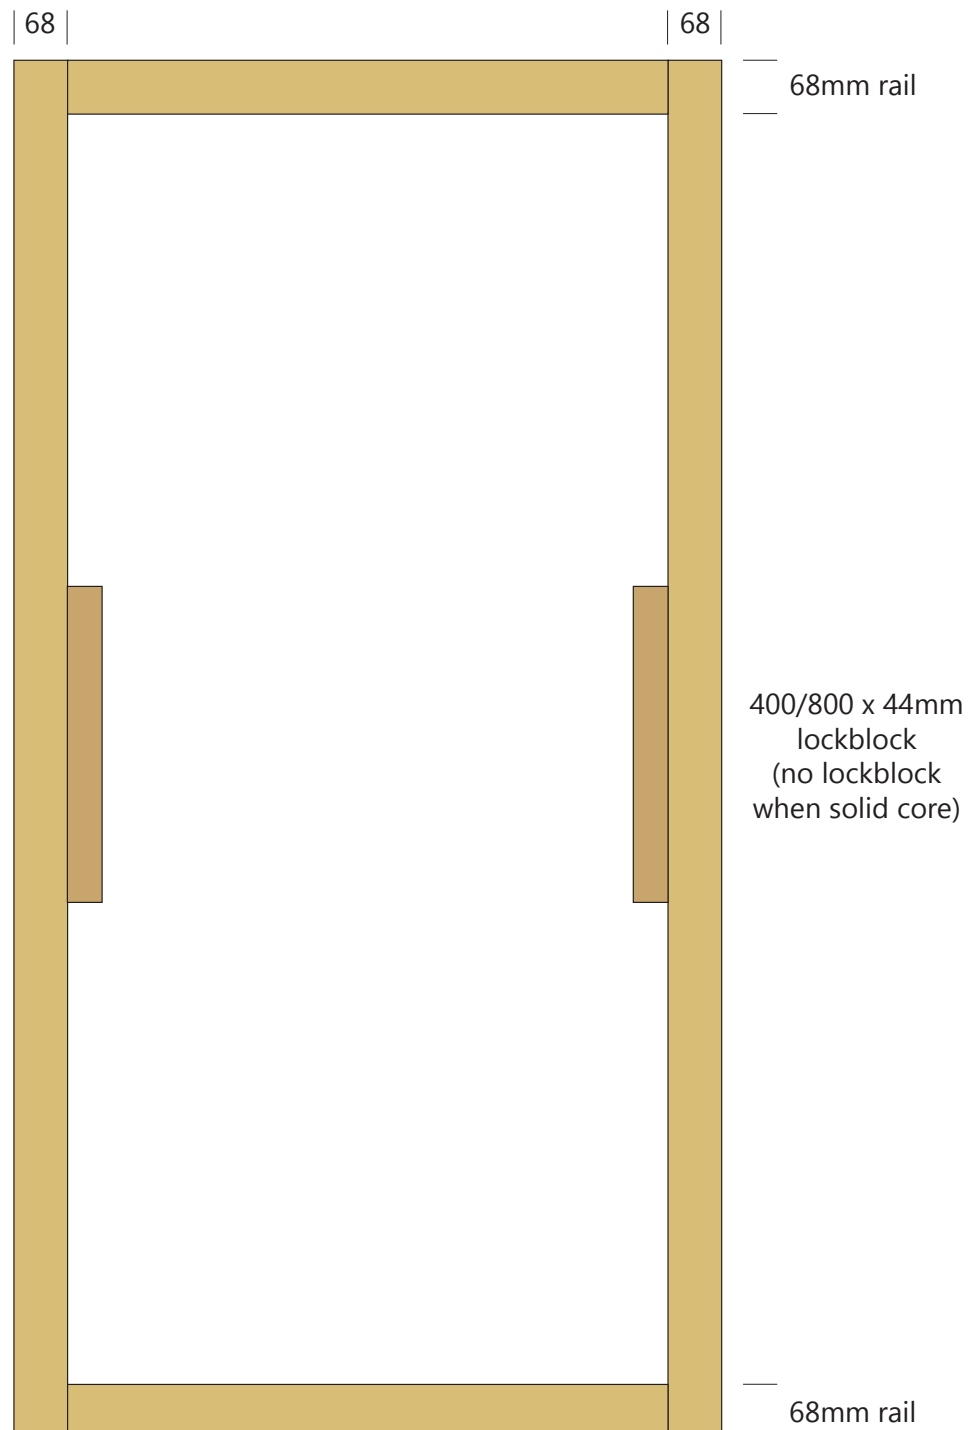


- External 68mm rails and stiles
- 400 x 44mm lockblock, or 800 x 44mm lockblock if over 1980 high or 960 wide
- No lockblock when Solid Core
- Max. height 2700mm
- Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA

Oversize
Type D



Up to 3600 high x 1211-1400 wide

• Poly Core

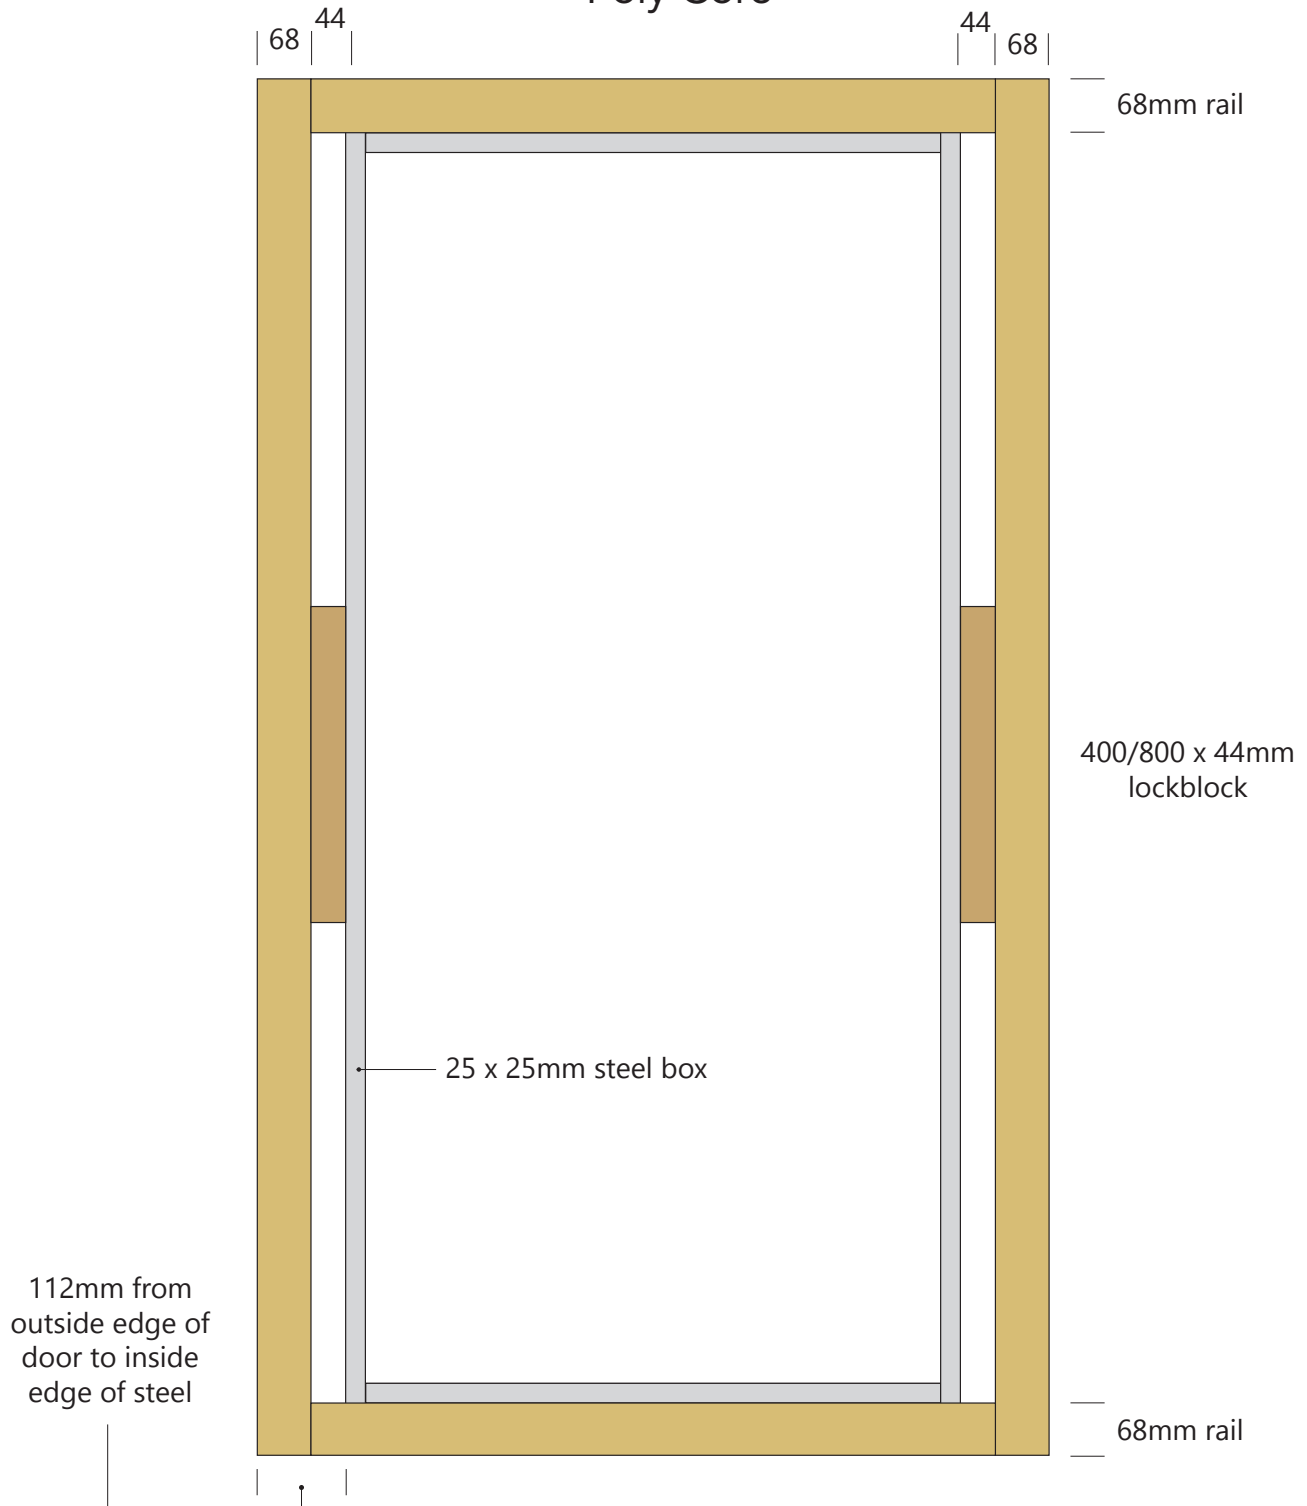


- External 68mm rails and stiles
- Steel box section 4 sides
- Available in Poly Core only
- Max height 3600mm
- 400 x 44mm lockblock, or 800 x 44mm lockblock if over 1980 high
- MDF skins
- No joins in door face
- Door weight 21kg m²
- Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA

Oversize
Type E



Up to 3600 high x 1401–1600 wide

• Poly Core

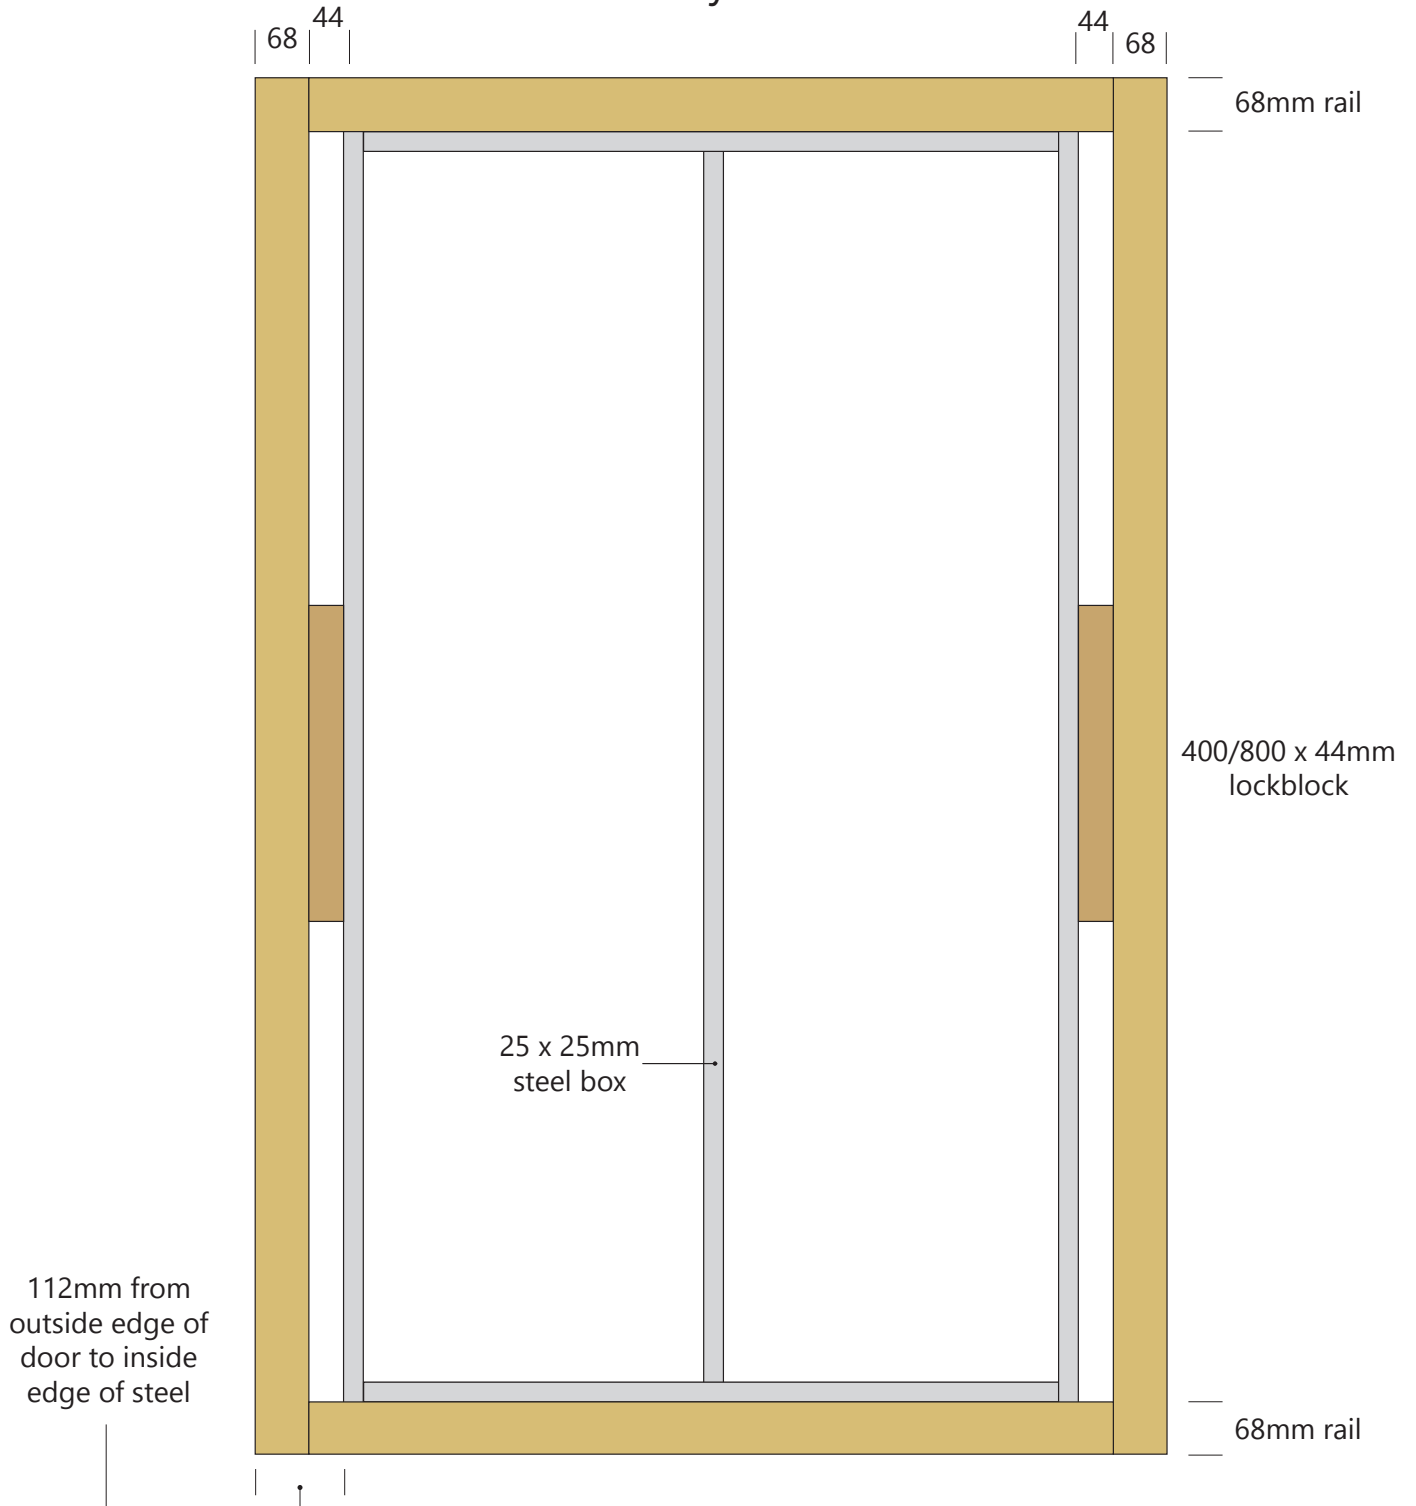


- External 68mm rails and stiles
- Steel box section 4 sides and 1 vertical centre section
- Available in Poly Core only
- Max height 3600mm
- 400 x 44mm lockblock, or 800 x 44mm lockblock if over 1980 high
- MDF skins
- No joins in door face
- Door weight 21kg m²
- Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA

Oversize
Type F



Up to 3600 high x 1601–2400 wide

• Poly Core

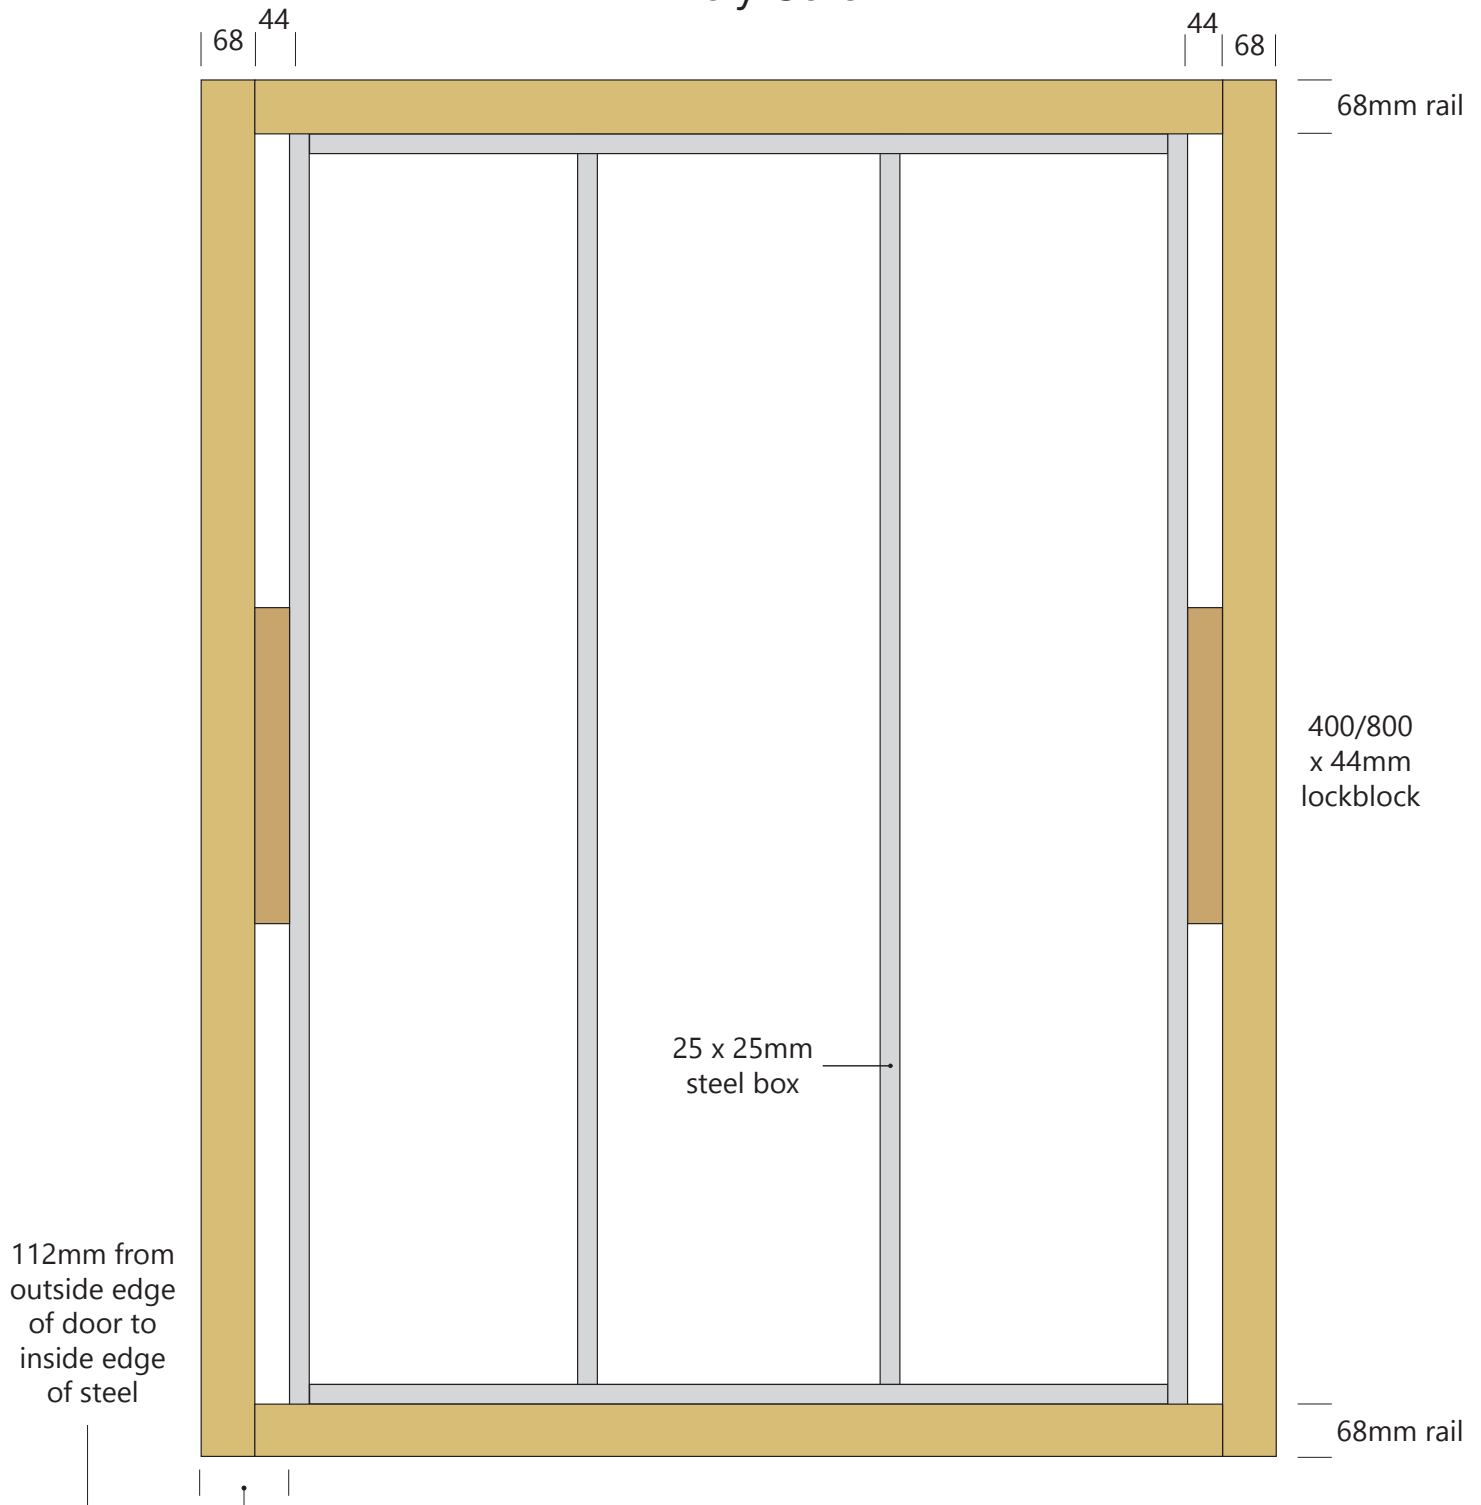


- External 68mm rails and stiles
- Steel box section 4 sides and 2 vertical centre sections
- 400 x 44mm lockblock, or 800 x 44mm lockblock if over 1980 high
- Max height 3600mm
- Doors up to 1600mm wide available at 37 or 42mm thick
- Doors over 1600mm wide are 42mm thick as standard
- Available in Poly Core only
- MDF skins
- No joins in door face
- Door weight 21kg m²

Steel One Side
Type G



Up to 2400 high x 910 wide

• Poly Core • Solid Core

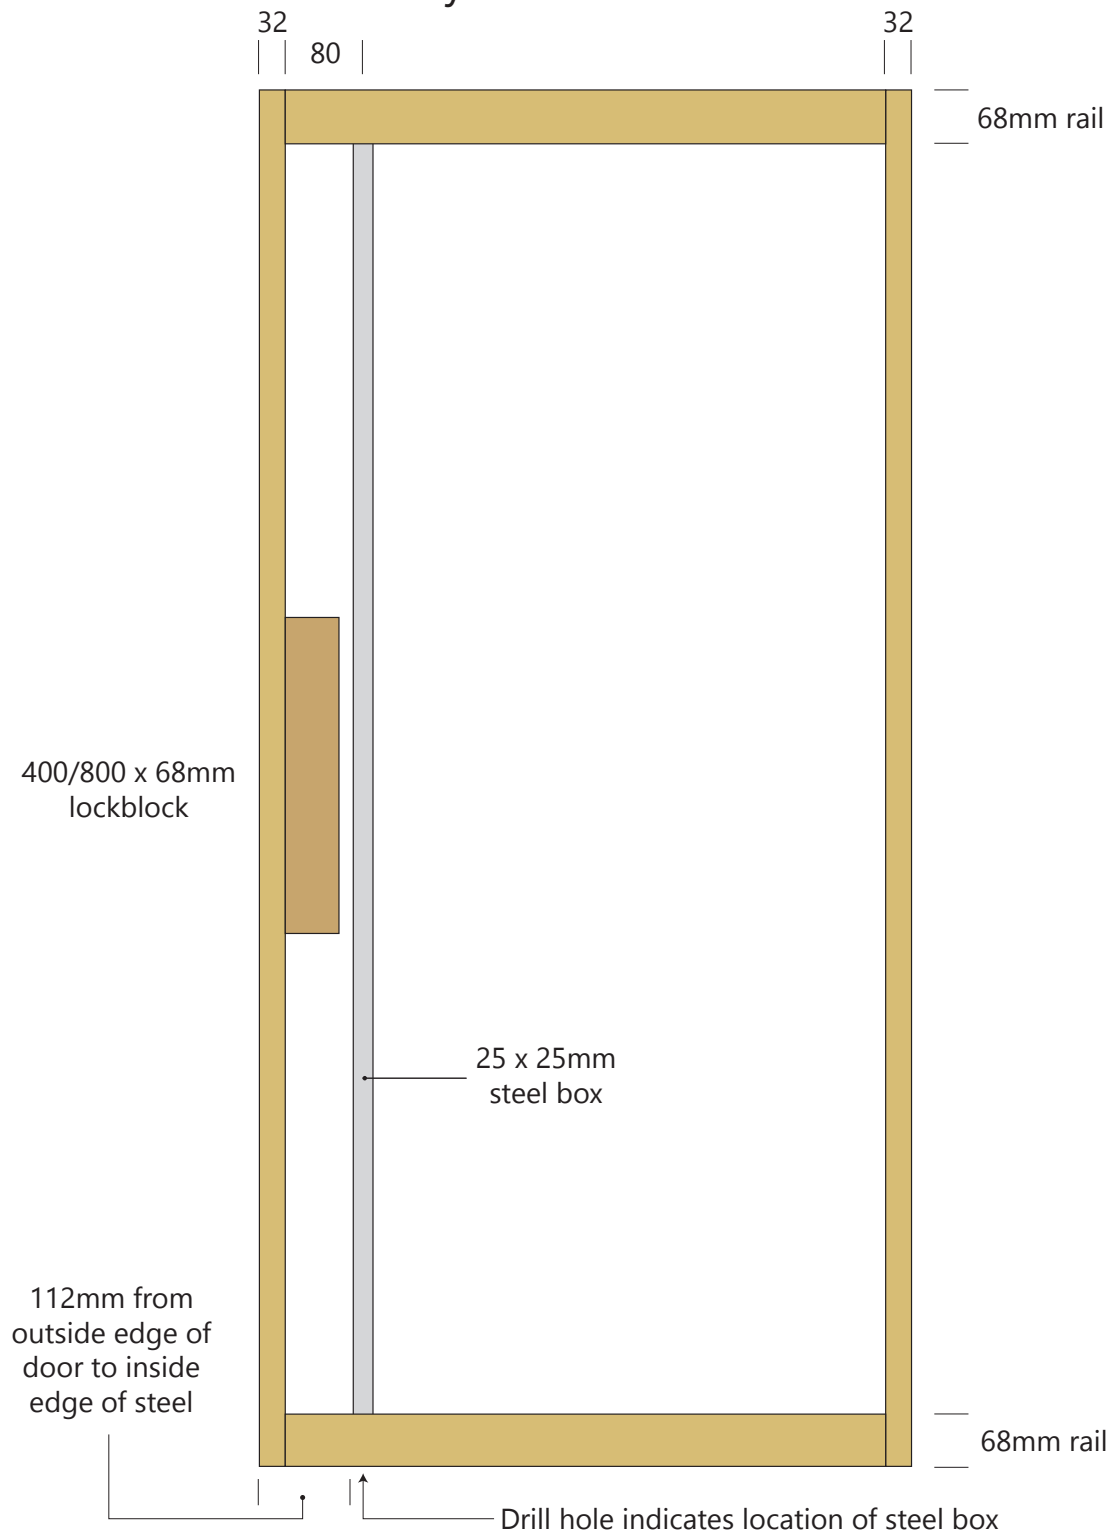


- External 68mm rails and 32mm stiles
- Steel box section 1 sides
- 400 x 68mm lockblock, or 800 x 68mm lockblock if over 1980 high
- Max height 2400mm
- Available in Poly Core or Solid Core only
- MDF skins
- Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA

Standard
Steel 2 Sides
Type H



1980–2400 high x 410–960 wide - Standard Steel 2 Sides

• Poly Core • Solid Core

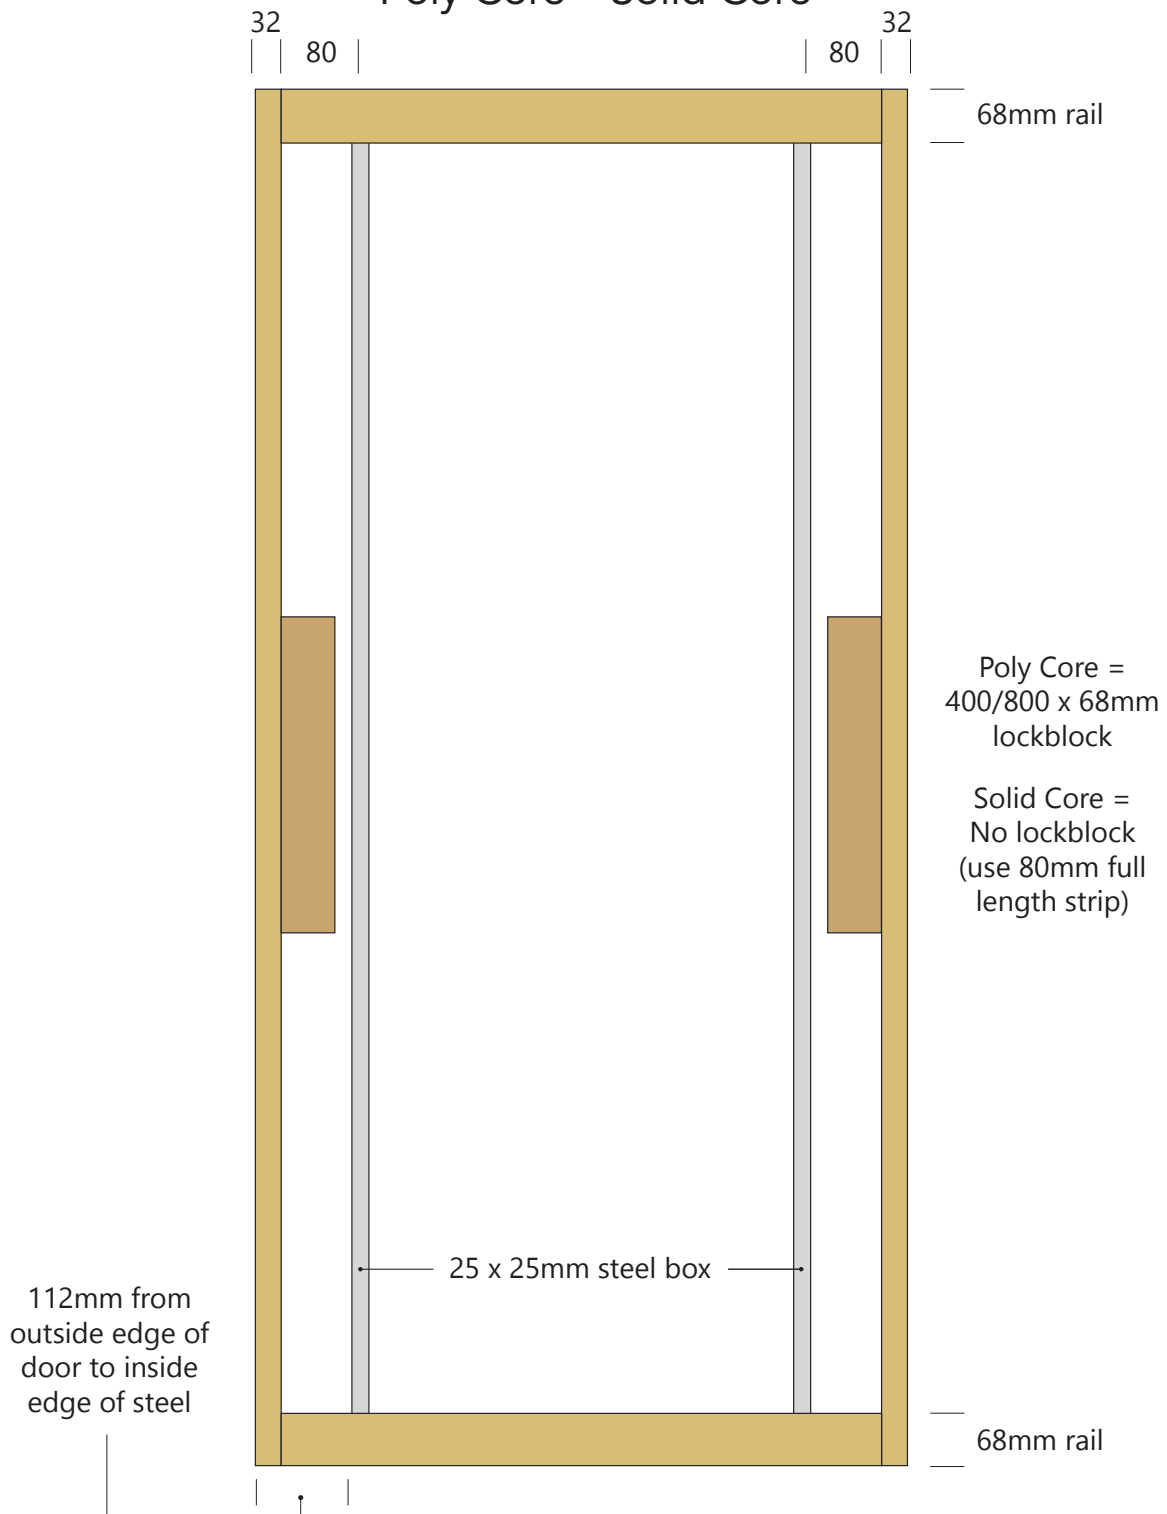


- External 68mm rails and 32mm stiles
- Steel box section 2 sides
- 400 x 68mm lockblock, or 800 x 68mm lockblock if over 1980 high
- Max height 2400mm
- Available in Poly Core or Solid Core only
- MDF skins
- Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA

ULCD & Standard
Steel 2 Sides
Type I



2401–2700 high x 410–960 wide
1980–2700 high x 960–1210 wide


• Poly Core • Solid Core

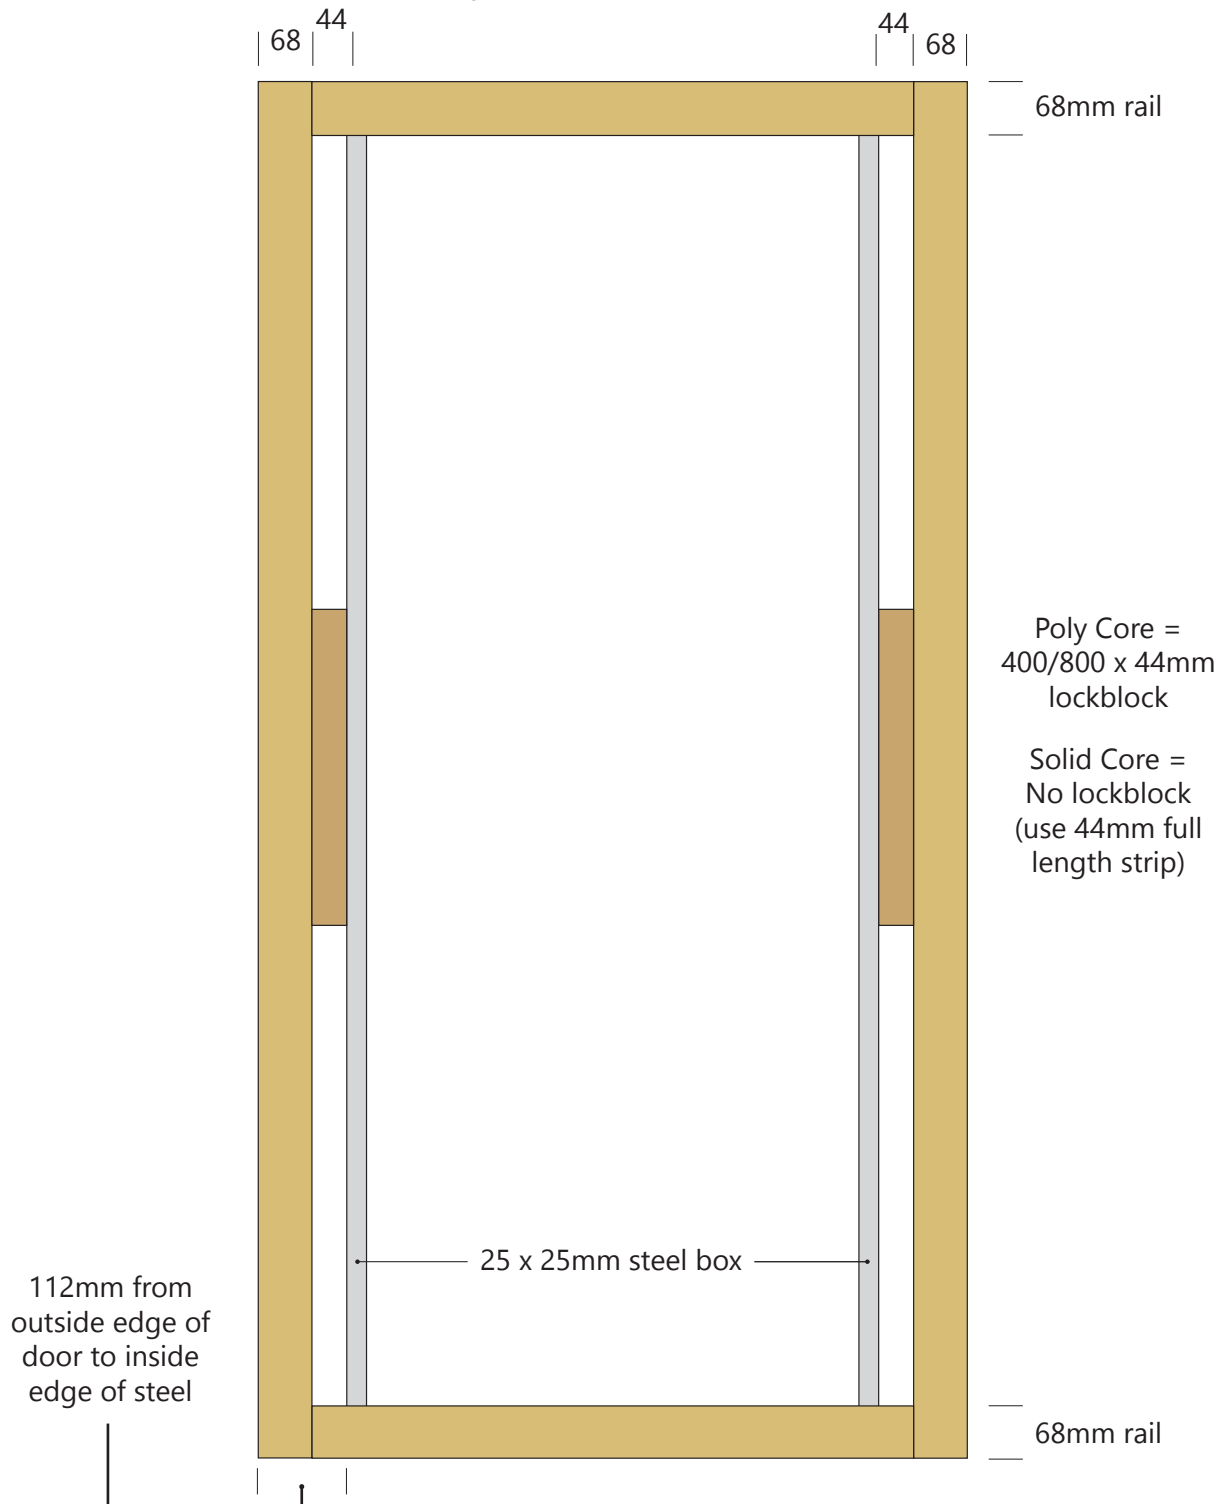

- External 68mm rails and stiles
- Steel box section 2 sided
- 400 x 44mm lockblock, or 800 x 44mm lockblock if over 1980 high
- Max height 3600mm
- Available in Poly Core or Solid Core only
- MDF skins
- Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA

1980–2400 high x 410–960 wide - ULCD

• Poly Core

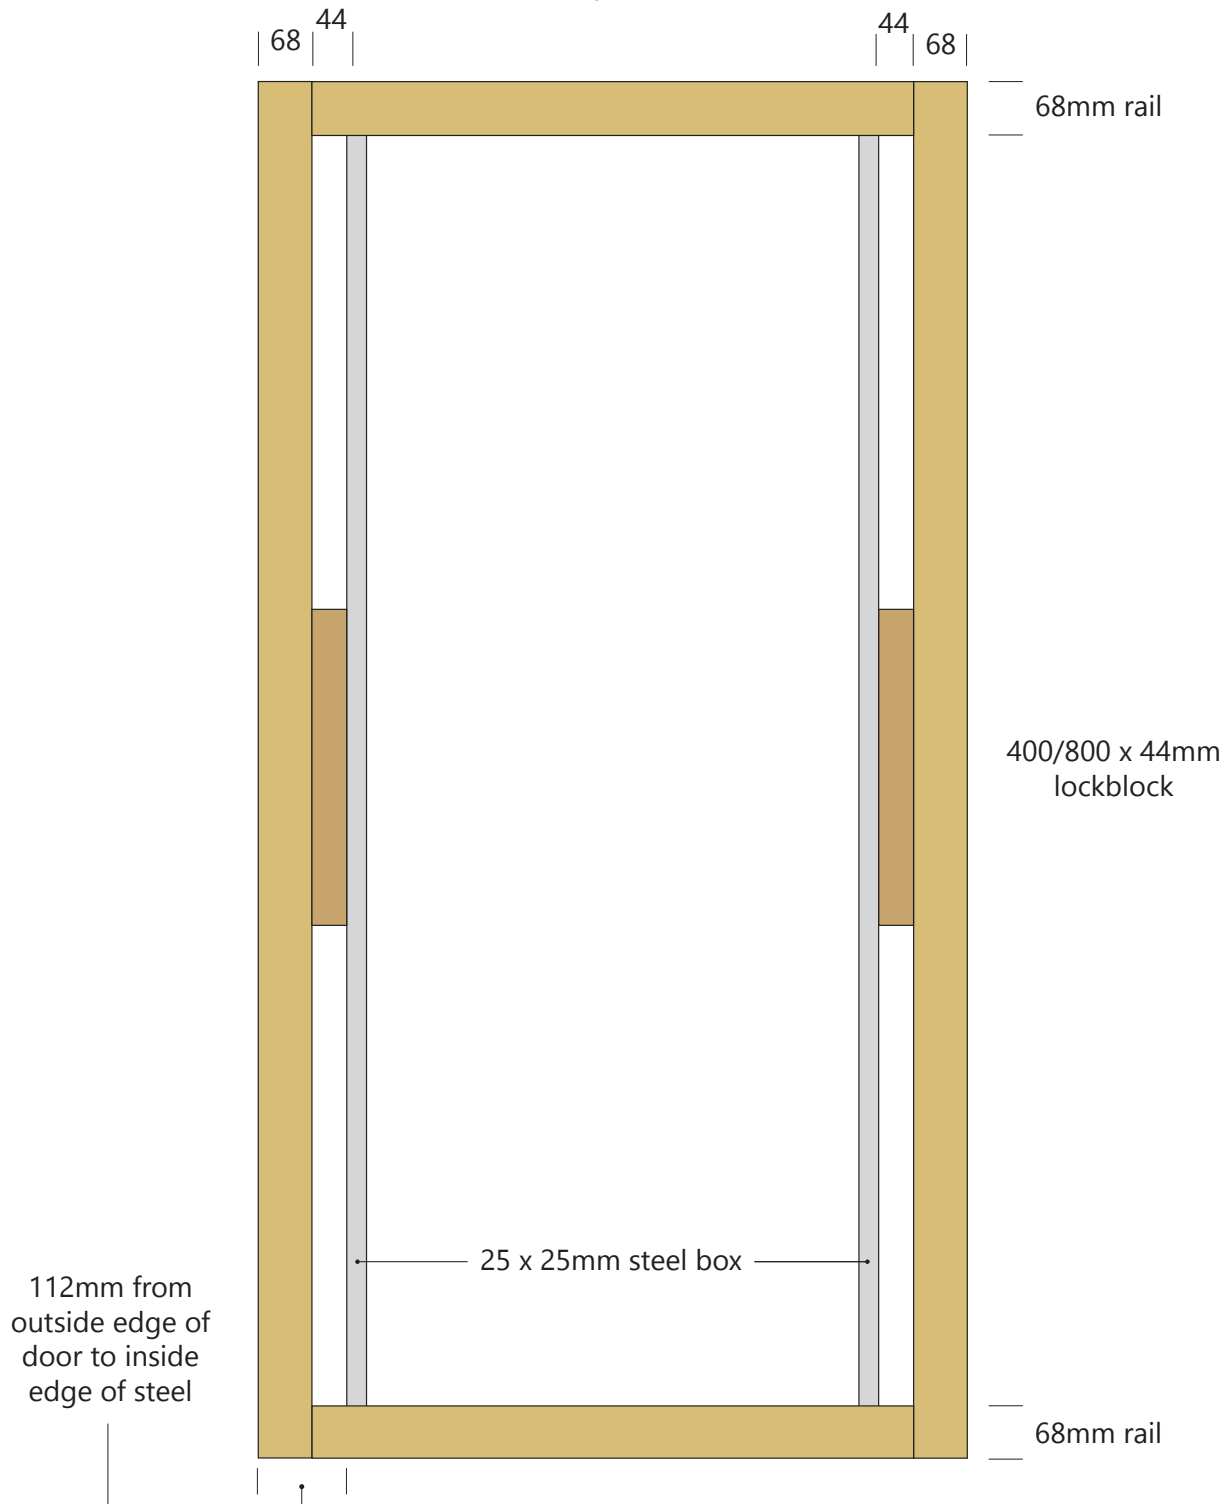

- External 68mm rails and stiles
- Steel box section 2 sided
- 400 x 44mm lockblock, or 800 x 44mm lockblock if over 1980 high
- Max height 3600mm
- Available in Poly Core only
- MDF skins
- Custom rails and stiles can be ordered upon request to suit the likes of barn doors or custom hardware - POA



Contact us:

P: +64 3 313 4754 or 0800 TIMBER

E: sales@hallmarkgroup.co.nz

W: www.hallmarkgroup.co.nz

355 Flaxton Rd, PO Box 413

Rangiora 7440, New Zealand