

HINGE ARRANGEMENT OPTIONS

Fire-rated doors (Europa and Falcon brands).


Non-rated and Smoke-rated doors.

Heavy-duty doors, including steel faced and lead lined designs

Hinge Arrangements Options

Hinge requirements are based on the height and width of the door leaf. The table below details the options available. Hinge positions are indicated by the dots.

For unequal pairs, the hinge arrangement for the wider leaf applies.

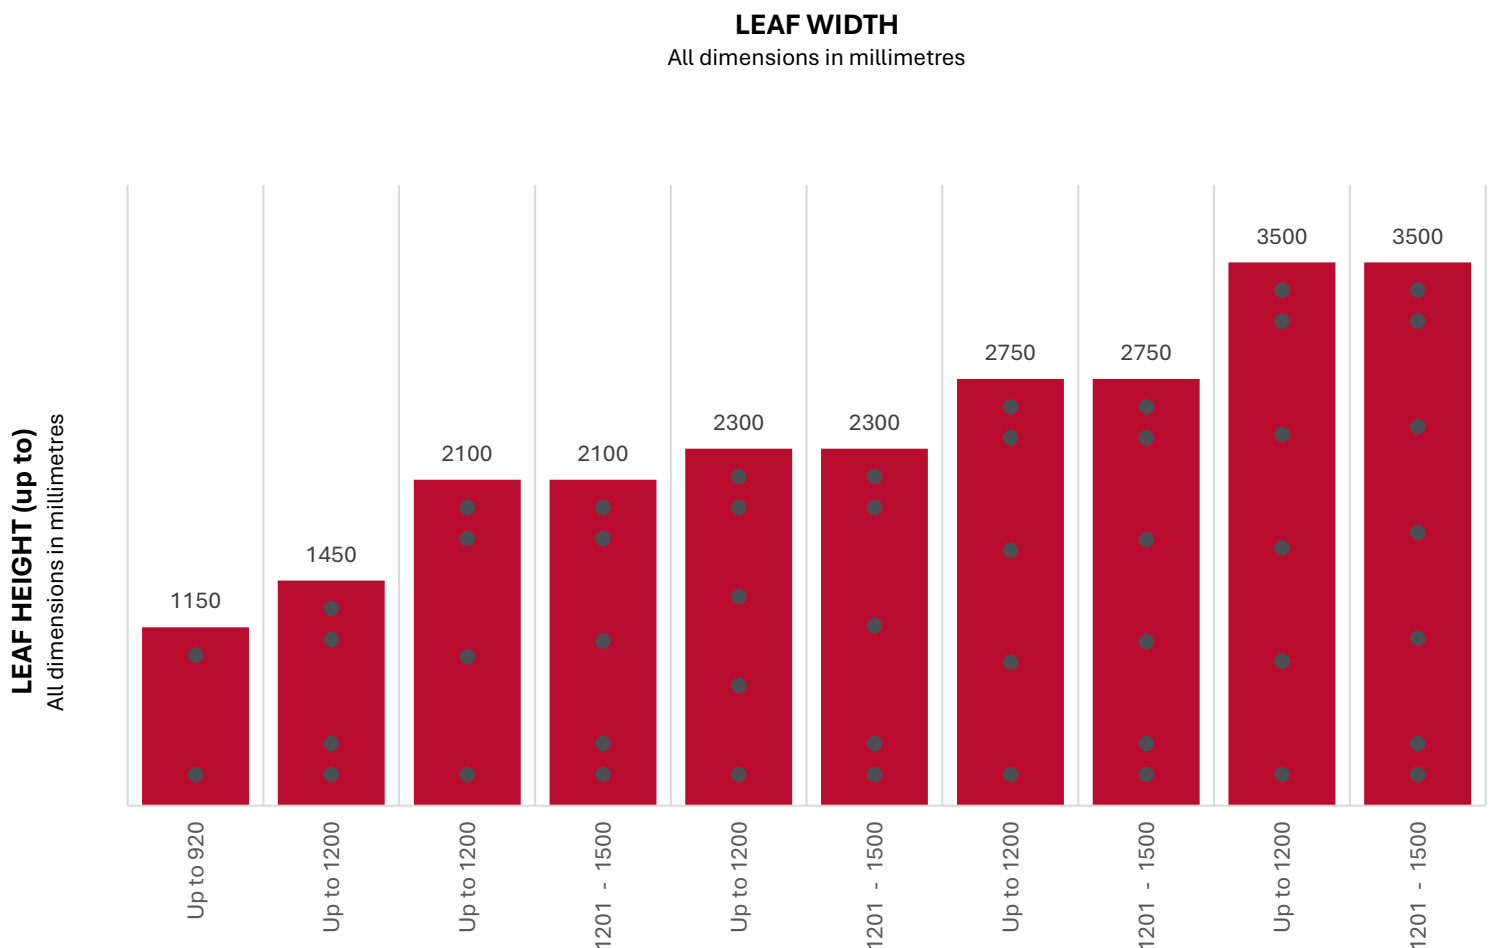

Dimensional Details

Dimensions are top down and bottom up on the leaf to the centres of the hinge.
All dimensions are in millimetres.

LEAF HEIGHT (up to)	Hinge	1150	1450	2100	2100	2300	2300	2750	2750	3500	3500
LEAF WIDTH		Up to 920	Up to 1200	Up to 1200	1201 - 1500	Up to 1200	1201 - 1500	Up to 1200	1201 - 1500	Up to 1200	1201 - 1500
QTY HINGES		2	4		5				6		7
Dimension FROM TOP of leaf	1	180	180	180	180	180	180	180	180	180	180
	2		380	380	380	380	380	380	380	380	380
Dimension FROM BOTTOM of the leaf	2	200		1 hinge *	1 hinge *	2 hinges *	1 hinge *	2 hinges *	2 hinges *	3 hinges *	3 hinges *
	3		400								
	4		200	200	400		400				
	5				200	200	200	200	400		
	6								200	200	400
	7										200

* Equally spaced between the two adjacent fixed position hinges.

Technical Support

Our door experts are happy to assist with any queries, so please feel free to phone: 03 313 4754 (or 0800 846 237) or email specification@hallmarkgroup.co.nz